Typenschlüssel : Bausatzmotor

1MS240

Stator für Bausatz-Spindelmotor 1MB

INN 41.20-24-02
2000-12-06

Kurztext-Spalte →	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Beispiel:	1	M	S	2	4	0	F	-	4	A	-	A	1	/	S	0	1	0																								

1. Produktgruppe
1.1 1MS . . . . . = 1MS

2. Motorbaugröße
2.1 240 . . . . . = 240

3. Motorbaulänge
3.1 Baulängen . . . . . = B, F, H

4. Wicklungskennzeichen
4.1 1MS240B . . . . . = 4A
4.2 1MS240F . . . . . = 4A
4.3 1MS240H . . . . . = 4B

5. Statorausführung
5.1 mit Aluminium-Kühlmantel . . . . . = A

6. Elektrischer Anschluss
6.1 Leitungen an dicker Statorseite herausgeführt / 1,5 m . . . . . = 1
6.2 Leitungen an schmaler Statorseite herausgeführt / 1,5 m . . . . . = 2

7. Sonderausführung
wird von Rexroth Indramat festgelegt und mit einer Sondernummer dokumentiert.
7.1 Bei Standardstatoren entfällt dieses Feld.
7.2 Heiß- und Kaltleiter für Fremdantriebsregelgeräte . . . = S010

Bildbeispiel: 1MB

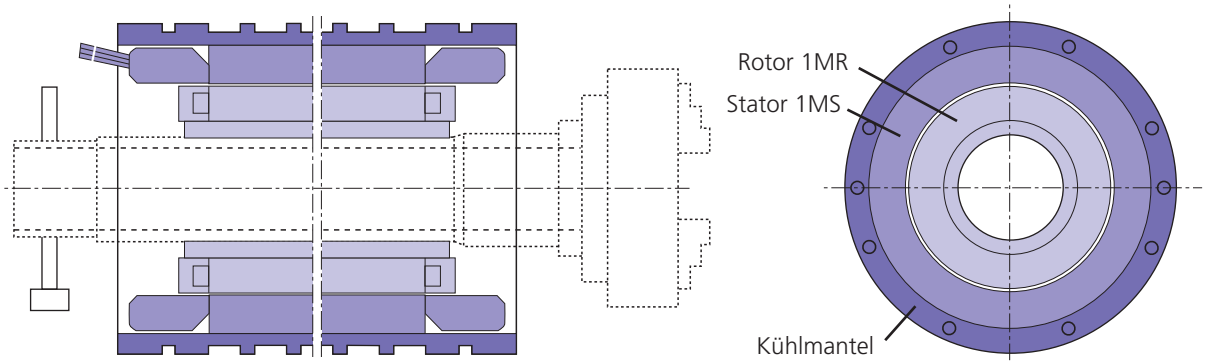

"Schutzvermerk DIN 34 beachten" - "Copyright reserved"

Rexroth Indramat GmbH
Bgm.-Dr.-Nebel-Straße 2 • D-97816 Lohr a. Main
Telefon (0 93 52) 40-0 • Telefax (0 93 52) 40-48 85

geändert: NM, Weißbeck
geprüft: NM, Ehm
erstellt in: FreeHand 8.0

Daten- oder Maßangaben dienen nur der unverbindlichen Information über grundsätzliche Produktmerkmale !

Dok: INN-41-20-T24-02-M03-1MS.fh8

Type code : Kit motor

1MS240

Stator for 1MB frameless spindle motor

INN 41.20-24-02
2000-12-06

Abbrev. Column →	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Example:	1	M	S	2	4	0	F	-	4	A	-	A	1	/	S	0	1	0																								

1. Product group
1.1 1MS . . . . . = 1MS

2. Motor size
2.1 240 . . . . . = 240

3. Motor length
3.1 Lengths . . . . . = B, F, H

4. Windings code
4.1 1MS240B . . . . . = 4A
4.2 1MS240F . . . . . = 4A
4.3 1MS240H . . . . . = 4B

5. Stator design
5.1 with aluminum cooling jacket . . . . . = A

6. Electrical connection
6.1 Cables conducted through thicker end of stator / 1.5 m . . . . . = 1
6.2 Cables conducted through narrow end of stator / 1.5 m . . . . . = 2

7. Special design
determined and documented with a special numeric code by Rexroth Indramat.
7.1 Does not apply to standard stators.
7.2 NTC and PTC resistors for third-party controllers . . . . = S010

Illustartion example: 1MB

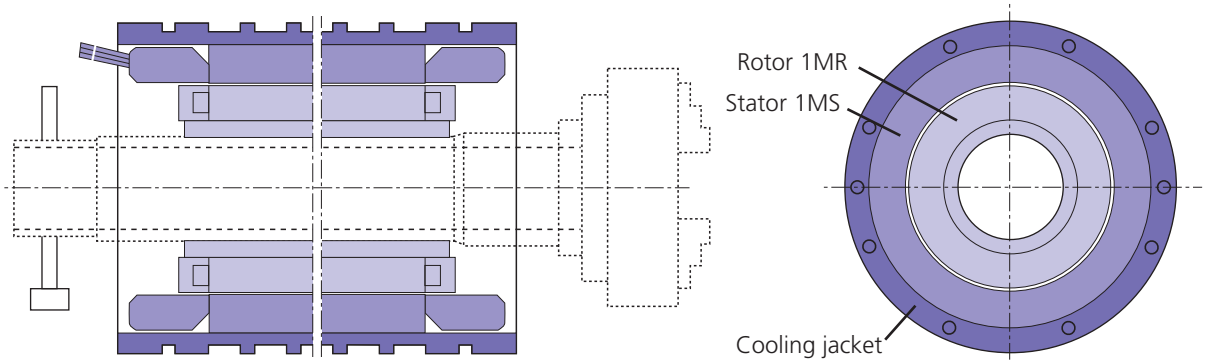

"Schutzvermerk DIN 34 beachten" - "Copyright reserved"

Rexroth Indramat GmbH
Bgm.-Dr.-Nebel-Straße 2 • D-97816 Lohr a. Main
Telephone (0 93 52) 40-0 • Telefax (0 93 52) 40-48 85

revised: NM, Weißbeck
proved: NM, Ehm
draw up in: FreeHand 8.0

Data and dimensions serve to inform about product characteristics and are not binding !

Doc: INN-41-20-T24-02-M03-1MS.fh8