Typenschlüssel : Bausatzmotor

1MS241

Stator für Bausatz-Spindelmotor 1MB

INN 41.20-24-12
2001-09-04

Kurztext-Spalte →	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Beispiel:	1	M	S	2	4	1	H	-	6	D	-	A	1	/	S	0	1	0																								

1. Produkt
1.1 1MS . . . . . = 1MS

2. Motorbaugröße
2.1 241 . . . . . = 241

3. Motorbaulänge
3.1 Baulängen . . . . . = D, H

4. Wicklungskennzeichen
4.1 1MS241D . . . . . = 6A, 6C
4.2 1MS241H . . . . . = 6C, 6D, 6G

5. Statorausführung
5.1 mit Aluminium-Kühlmantel . . . . . = A

6. Elektrischer Anschluss
6.1 Leitung 1,5 m, an Statorseite mit größerem Außendurchmesser herausgeführt . . . . . = 1
6.2 Leitung 1,5 m, an Statorseite mit kleinerem Außendurchmesser herausgeführt . . . . . = 2

7. Sonderausführung
7.1 Bei Standardstatoren entfällt dieses Feld.
7.2 Heiß- und Kaltleiter für Fremdantriebsregelgeräte . . . = S010

Bildbeispiel: 1MB

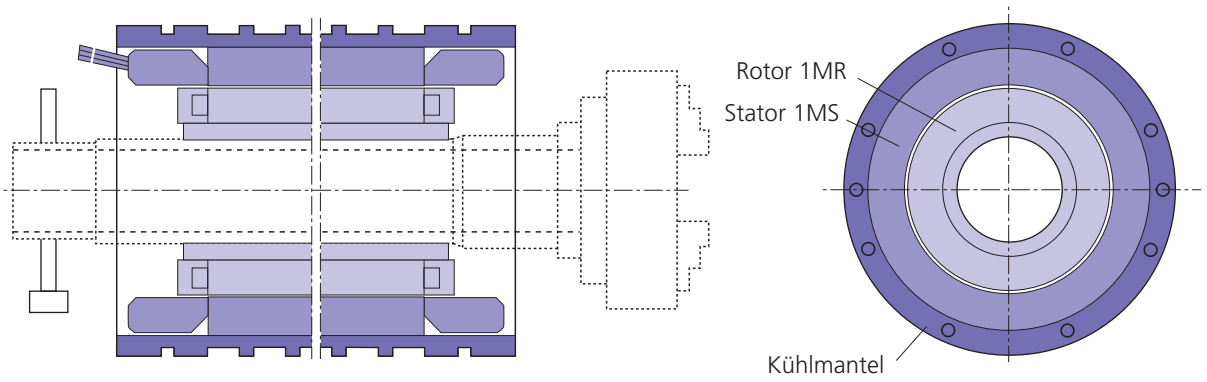

"Schutzvermerk DIN 34 beachten" - "Copyright reserved"

Rexroth Indramat GmbH
Bgm.-Dr.-Nebel-Straße 2 • D-97816 Lohr a. Main
Telefon (0 93 52) 40-0 • Telefax (0 93 52) 40-48 85

geändert: BRC/NOR, Weißbeck
geprüft: BRC/NOR, Ehm
erstellt in: FreeHand 9.0

Daten- oder Maßangaben dienen nur der unverbindlichen Information über grundsätzliche Produktmerkmale !

Dok: INN-41-20-T24-12-M05-1MS.fh9

Rexroth

Type code : Kit motor

1MS241

Stator for 1MB frameless spindle motor

INN 41.20-24-12
2001-09-04

Abbrev. Column →	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Example:	1	M	S	2	4	1	H	-	6	D	-	A	1	/	S	0	1	0																								

1. Product
1.1 1MS . . . . . = 1MS

2. Motor size
2.1 241 . . . . . = 241

3. Motor length
3.1 Lengths . . . . . = D, H

4. Windings code
4.1 1MS241D . . . . . = 6A, 6C
4.2 1MS241H . . . . . = 6C, 6D, 6G

5. Stator design
5.1 with aluminum cooling jacket . . . . . = A

6. Electrical connection
6.1 1.5 m cable, conducted through stator end with bigger exterior diameter. . . . . = 1
6.2 1.5 m cable, conducted through stator end with smaller exterior diameter . . . . . = 2

7. Special design
7.1 Does not apply to standard stators.
7.2 NTC and PTC resistors for third-party controllers . . . . = S010

Illustration example: 1MB

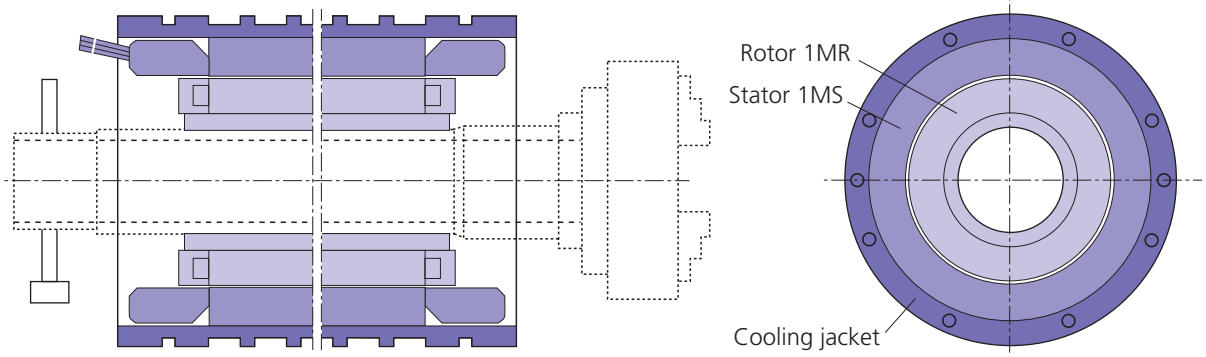

"Schutzvermerk DIN 34 beachten" - "Copyright reserved"

Rexroth Indramat GmbH
Bgm.-Dr.-Nebel-Straße 2 • D-97816 Lohr a. Main
Telephone (0 93 52) 40-0 • Telefax (0 93 52) 40-48 85

revised: BRC/NOR, Weißbeck
proved: BRC/NOR, Ehm
draw up in: FreeHand 9.0

Rexroth Indramat

Data and dimensions serve inform about product characteristics and are not binding !

Doc: INN-41-20-T24-12-M05-1MS.fh9