Typenschlüssel : Linearmotor

LSS120

Sekundärteil für Linearmotor LSF120

INN 41.42-12-02
1999-11-18

Kurztext-Spalte →	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Beispiel:	L	S	S	1	2	0	-	B	1	-	0	6	0	0	A																											

1. Produktgruppe
1.1 LSS . . . . . = LSS

2. Motorbaugröße
2.1 120 . . . . . = 120

3. Magnetträgerausführung
3.1 Ausführung . . . . . = B

4. Mechanische Ausführung
4.1 Schraubenbefestigung (von oben) . . = 1

5. Länge
5.1 150...1.200 mm (in 150 mm Schritten)
z.B. 600 mm . . . . . = 0600

6. Abdeckblech
6.1 mit Abdeckblech. . . . . = A

Bildbeispiel: Linearmotor LSF

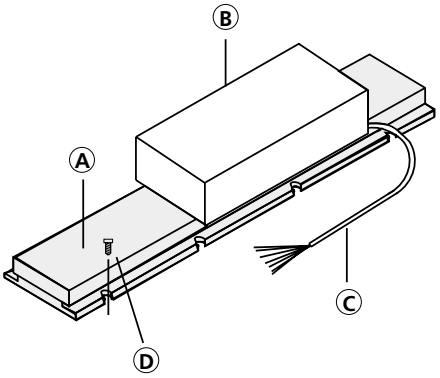

Ⓐ Sekundärteil LSS
Ⓑ Primärteil LSP (je nach Ausführung - Standardkapselung oder Thermokapselung)
Ⓒ Leistungsanschluss rechts unten
Ⓓ Schraubbefestigung (von oben)

"Schutzvermerk DIN 34 beachten" - "Copyright reserved"

Rexroth Indramat GmbH
Bgm.-Dr.-Nebel-Straße 2 • D-97816 Lohr a. Main
Telefon (0 93 52) 40-0 • Telefax (0 93 52) 40-48 85

geändert: NM, Steg
geprüft: NM, Ehm
erstellt in: FreeHand 8.0

Daten- oder Maßangaben dienen nur der unverbindlichen Information über grundsätzliche Produktmerkmale !

Dok: INN-41-42-T12-02-M06-LSS.fh8

Type code : Linear motor

LSS120

Secondary part for LSF120 linear motor

INN 41.42-12-02
1999-11-18

Abbrev. Column →	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
Example:	L	S	S	1	2	0	-	B	1	-	0	6	0	0	A																											

1. Product group
1.1 LSS . . . . . = LSS

2. Motor size
2.1 120 . . . . . = 120

3. Magnet holder design
3.1 Design . . . . . = B

4. Mechanical design
4.1 Screw mounting (from top) . . . . . = 1

5. Length
5.1 150...1200 mm (in 150 mm steps)
e.g., 600 mm . . . . . = 0600

6. Cover
6.1 with cover . . . . . = A

Illustration example: Linear motor LSF

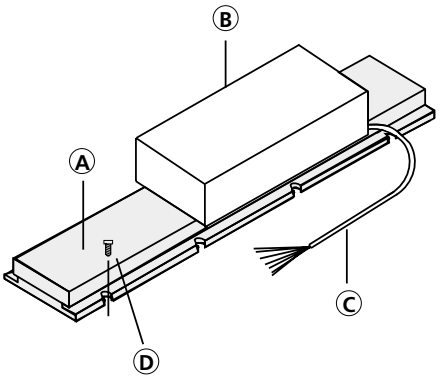

Ⓐ Secondary part LSS
Ⓑ Primary part LSP (Standard encapsulation or Thermo-encapsulation)
Ⓒ Position of power connection right, below
Ⓓ Screw mounting (from above)

"Schutzvermerk DIN 34 beachten" - "Copyright reserved"

Rexroth Indramat GmbH
Bgm.-Dr.-Nebel-Straße 2 • D-97816 Lohr a. Main
Telephone (0 93 52) 40-0 • Telefax (0 93 52) 40-48 85

revised: NM, Steg
proved: NM, Ehm
draw up in: FreeHand 8.0

Data and dimensions serve to inform about product characteristics and are not binding !

Doc: INN-41-42-T12-02-M06-LSS.fh8